




鸿雁包装
HONGYAN PACK

聚乙烯薄膜领导者

>> Polyethylene Film Leader

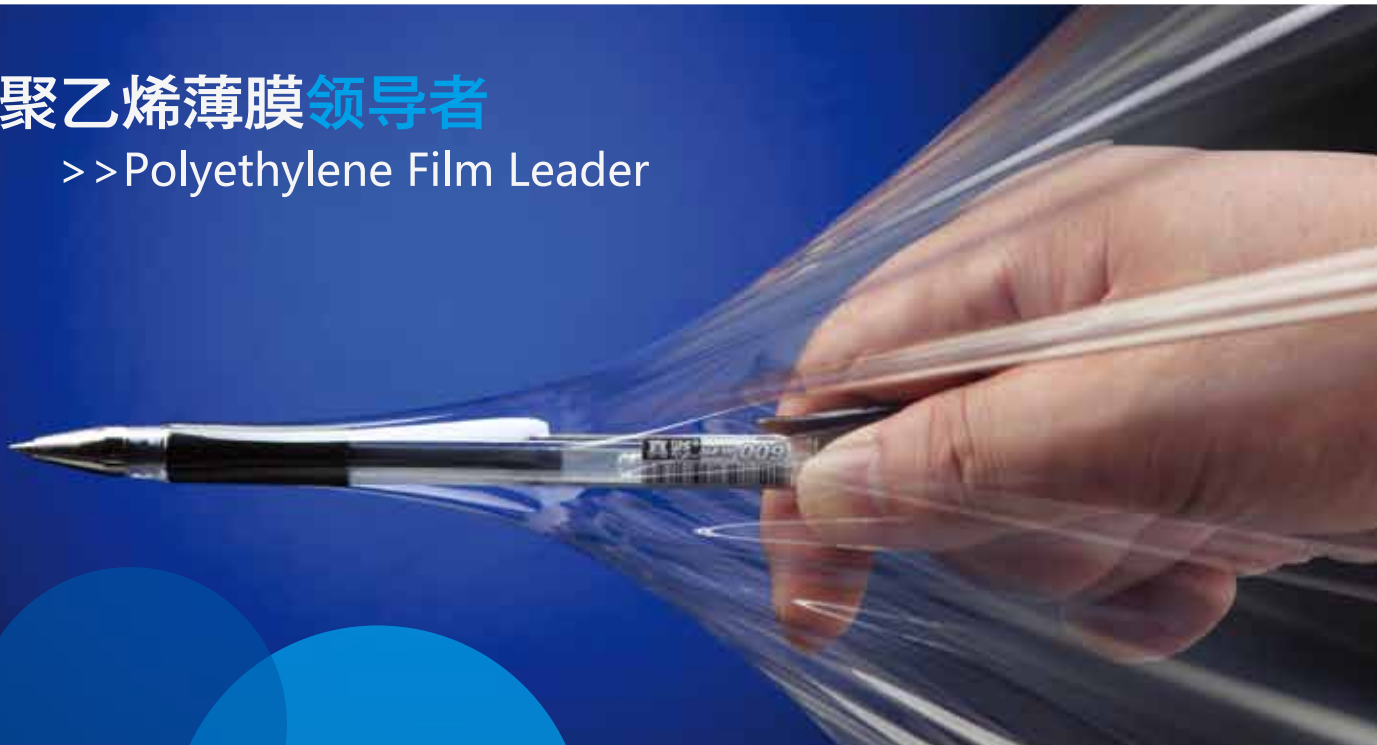

公司简介

鸿雁包装材料有限公司是一家集研发、设计、生产、销售、服务为一体的中国聚乙烯包装薄膜制造服务公司，是当前国内聚乙烯包装薄膜制造行业发展速度最快、技术最先进、规模最大的重点高科技企业之一。

一直以来，鸿雁秉持“国际品质、中国成本”的经营理念，以“创建世界一流聚乙烯包装薄膜制造企业”为目标，按照国际化公司的标准来管理企业、推动企业进步，积极推广国际包装行业“环保、健康、安全”的产品开发理念，为此公司每年投入大量的研发资金用于产品创新，不断满足客户的需求，同时公司与埃克森美孚化工ExxonMobil Chemical、Dow陶氏化学、三井化学株式会社等多家原料商合作开发出顶级的原料配方技术和生产工艺技术，生产并已销售了一系列具有国际水准的高品质缠绕膜、保护膜，同时为客户提供国际最先进的包装技术方案、产品整体规划设计方案和优质服务。凭借专业的技术和完善的管理制度，我们为国内外客户提供高性价比的产品。卓越的研发设计能力、卓越的问题解决能力和卓越的工艺创新能力，造就了鸿雁强大的综合实力！鸿雁系列产品不仅在国内占有很大的市场份额，在国际市场也赢得了越来越多行家的信赖，树立了良好的国际声誉。目前，公司的产品远销至美国、欧洲、日本、台湾等二十多个国家及地区。

鸿雁的不断进步，源自鸿雁以“为客户创造价值”的企业宗旨；源自起步就力求与世界同步；源自为客户利益而不懈地进行技术和价值成本创新的努力；源自企业高效管理推动与其实现；更重要的是源自您的关注和支持。鸿雁愿能与您一起共同成长，共同进步，成为行业所期望，社会所期待的企业！





Company Profile

Hongyan Packing Material Co., Ltd is one of the largest entities with booming growth and advanced technologies in packing industry in China, and it has integrated functionalities in R&D, design, manufacturing, sales and customer service of PE Film in China.

Since established, Hongyan is aiming at “world class PE film manufacturing enterprise” with “International Quality, Local Cost” management guidance. It is growing with globalized standard and positively extending the International Packing Industry R&D concept “Environment Protected, Healthy, Safety”. Every year, Hongyan spends lots of R&D cost on product innovations to satisfy the customers ,meanwhile it has built up good business partnership with key raw materials suppliers like Exxon Mobil, Dow Chemical etc. Their co-worked R&D team has developed advanced intergradient and process technologies. So far, some series of high quality packing materials and machines have been launched to market. The customized products and specialized customer service have got well recognition from our customers. The outstanding R&D, problem solving and innovation capabilities also have built up Hongyan integrated strength. The big market share and good reputation have been spread out to both local and overseas customers from more than 20 countries and regions such as Europe, Japan, America, Taiwan, etc. Hongyan appreciates all your attention and support, which keeps it growing, same paced with world technology level and continuous on innovations. Together, we go faster.





鸿雁包装
HONGYAN PACK



挤出机组
Extruder




五层共挤流延膜生产线 5-layer Extrusion Cast Film Production Line

- >收卷速度高，设计线速可达600 m/min;
- >单线产量大，年产量可达11,000吨;
- >可在线分切生产4-8个膜卷，下游无需再进行传统的在线分切→复卷工艺;
- >产品品种多，既可生产工业缠绕膜，也可生产保护膜，牧草膜，还可生产家用保鲜膜等;
- >生产效率高，边条全部在线自动回收;
- >生产线自动化程度高，使用人工少。

- >High winding speed , designing line speed up to 600 m/min.
- >Big capacity in single line , the annual output up to 11,000 tons.
- >On-line slitting and producing 4-8 films ,downstream no need to slit on-line and rewind traditionally.
- >Variety kinds of products, not only can produce industrial stretch film, but also can produce protective film, grass membrane and household fresh film.
- >High production efficiency, the edge all can recovery automatically.
- >High degree automatic production line , less manual use.

在线自动测厚仪

Online Automatic Thickness Measurement

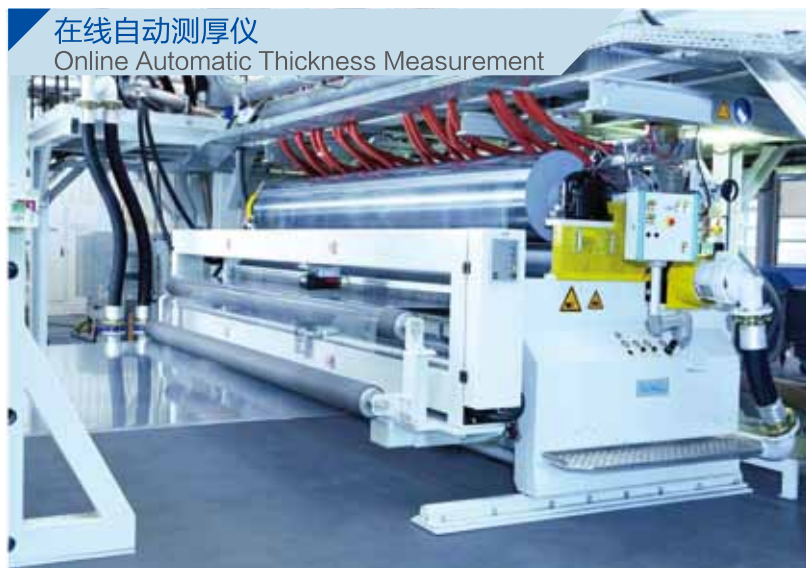

成型及自动模头装置
Molding & Automatic Die Device



工业基础 Industrial Base

鸿雁包装
HONGYAN PACK

自动收卷分切装置
Automatic Rewinding Cutting Device



全自动收卷装置
Fully Automatic Rewinding Device





鸿雁包装
HONGYAN PACK

五层共挤流延膜生产线
5-layer Extrusion Cast Film Production Line



工业基础 Industrial Base

吹膜机机组
Blown Film Machine Unit



无尘车间入口
Clean Workshop Entrance





手用缠绕膜打包
Hand Use Stretch Film Packaging



缠绕膜全自动复卷机台
Stretch Film Fully Automatic Rewinding Machine



母卷
Parent Roll



预拉伸机用缠绕膜打包
Machine Use Pre-stretch
Film Packaging

鸿雁包装

HONGYAN PACK



大型单轴自动切台
Large Uniaxial Automatic Cutting Machine



原物料仓库
Raw Material Warehouse



外销成品仓库
Export Finished Products Warehouse



内销成品仓库
Domestic Finished Products Warehouse

目录 Contents

一. 缠绕膜系列	I. PE Stretch Film Series	01
1. 机用缠绕膜	1. Machine Use Stretch Film	03
2. 手用缠绕膜	2. Hand Use Stretch Film	04
3. 分切膜 (迷你膜)	3. Slitting Stretch Film (Mini Stretch Film)	04
二. 保护膜系列	II. Protective Film Series	05
1. 静电保护膜	1. Electrostatic Protective Film	06
2. 防静电保护膜	2. Anti-static Protective Film	07
3. PET 保护膜	3. PET Protective Film	08
三. 胶带系列	III. Tape Series	09
1. BOPP 封箱胶带	1. BOPP Packing Tape	10
2. 双面胶带	2. Double Side Tape	10
3. 美纹纸胶带	3. Crepe Paper Masking Tape	11
4. PVC 电工胶带	4. PVC Insulation Tape	12
5. 铝箔胶带	5. Aluminum Foil Tape	12
6. 牛皮纸胶带	6. Kraft Paper Tape	13
7. 警示胶带	7. Warning Tape	13
8. 布基胶带	8. Cloth Tape	14
9. 纤维胶带	9. Filament Tape	14
四. 打包带系列	IV. Strap Series	15
1. PP打包带	1. PP Strap	16
2. PET塑钢打包带	2. PET Strap	17
五. PE袋等系列	V. PE Bag &Other Plastic Bags Series	18
1. 低压PE 袋	1. Low Pressure PE Bag	18
2. 高压PE 袋	2. High Pressure PE Bag	18
3. 防静电袋	3. Anti-Static Bag	18
4. 气泡袋	4. Bubble bag	18
5. 铝箔袋	5. Aluminum foil bag	19
6. 真空袋	6. Vacuum bag	19
7. 自封袋	7. Valve bag	19
8. EPE珍珠棉袋	8. EPE pearl cotton bag	19
9. 多色印刷袋	9. Multicolor printing bag	19
六. 纸品系列	VI. Paper Series	20
1. 纸护角	1. Paper corner protector	20
2. 纸管	2. Paper tube	20
七. 机器设备系列	VII. Machinery & Equipments Series	21
1. PE缠绕包装机	1. PE Wrapping Machine	21
2. 打带机	2. Strapping Machine	25
3. 打包机系列	3. Baler series	26
4. 电动手持式打包工具	4. Battery strapping tools	27
5. 气动手持式打包工具	5. Pneumatic strapping tools	27

PE 缠绕膜系列

STRETCH FILM SERIES



PE 缠绕膜系列 PE Stretch Film Series

鸿雁牌缠绕膜具备以下特点：

1. 鸿雁牌缠绕膜采用当今世界上最先进的制造设备和最顶尖的工艺技术制得，采用五层共挤流延设备允许融合不同树脂，以便制造更多便利客户需求的各种缠绕膜、保护膜，也保证了最佳原材料的运用。
2. 完整的计算机控制系统及自动模头，自动测厚仪调整系统确保产品厚度均匀品质稳定。
3. 鸿雁牌缠绕膜主要采用进口原料生产，主要的原料商有埃克森美孚化工ExxonMobil Chemical、Dow陶氏化学、三井化学株式会社等。保证原料的稳定供应，制得的产品具有高拉伸强度、高回缩力、高抗刺穿力、高抗撕裂强度、高透明度等优点。
4. 鸿雁公司不仅以实际行动实践着我们对客户承诺，还与研究机构开展战略性的企业社会责任研究项目。目前与埃克森美孚化学上海实验室、欧洲实验室、陶氏化学、中科院、中国石化、台塑集团等单位进行技术交流合作，生产出的鸿雁牌缠绕膜目前可以满足世界上任何国家，任何地区所有客人的任何要求。
5. 鸿雁定期推出可持续发展的更新报告，在降低污染、保护环境等方面不断取得了阶段性成果，现已研制出鸿雁牌机用预拉伸缠绕膜，厚度仅为12um超薄新产品，可替代目前市场中小线膜20um的产品，大大节约了原料的使用量。

Hong Yan brand stretch film is characterized by:

1. Our HongYan brand stretch film is reinforced by today world' s most advanced cast extrusion machines and best process , 5-layer cast film production line that allows for different types of resins to produce a variety of films that can be customized to your requirement . and also can ensure optimum use of raw materials
2. Fully - computerized operation and automatic die thickness control system ensures even thickness and consistent quality
3. HongYan brand stretch Film produced by imported raw material , the key raw material suppliers like ExxonMobil Chemical , Dow chemical , Mitsui chemical , can ensure excellent raw material supply , strong tensile strength , high retraction force , high puncture resistance , strong tear resistance , high transparency .
4. Hongyan company takes practical action to practice our commitment and cooperate with research institutions to carry out strategic social projects , cooperate and communicate with Exxon Mobil Shanghai laboratory , European lab , Dow chemical , Chinese science academy and Formosa Plastic Group in technology , the stretch film we produce can meet different kinds of demands in the world.
5. We timely launch sustainable development update report , and make process in reducing pollution , protecting the environment , Now we have developed Hong Yan brand machine use pre-stretch film , 12um ultra-thin new product , which can replace the common small and medium-sized line 20 um products , with more effective ways to use resources , greatly reduce raw material usage amount.

*常用绕膜物性指标

Commonly physical properties of stretch film

测试项目 Test item	单位 Unit	测试方法 Test method	手用 Hand-wrap	机用 Machine-wrap	预拉伸 Pre-stretch wrap
厚度 Thickness	μ	测厚仪 Thickness Gauge	9-25	9-30	12-30
雾度 Haze	%	ASTM D1003	1.2	1.2	1.2
60° C光泽度 Gloss 60° C angle	%	ASTM D523	86	86	90
拉伸强度 Tensile strength	Kg/cm ²	ASTM D882	MD	280 ↑	350 ↑
			TD	200 ↑	200 ↑
伸长率 Elongation	%	ASTM D882	MD	400 ↑	400 ↑
			TD	600 ↑	650 ↑
撕裂度 Tear resistance	Kg/cm ^v	ASTM D1922	MD	60 ↑	90 ↑
			TD	120 ↑	150 ↑
预拉伸率 Pre-stretch ratio	%	ASTEM D4649	——	——	200 ↑
粘着力 Cling force	g/25cm	SWANSON	20-50	30-60	40-70

备注：特殊规格可以根据客户的要求定制。

Remark: Special specification available upon request

1. 机用缠绕膜 Machine Use Stretch Film

PE缠绕膜系列 PE Stretch Film Series

鸿雁牌机用缠绕膜选用进口原料商埃克森美孚化工ExxonMobil Chemical、Dow陶氏化学等公司生产的线性低密度聚乙烯LLDPE和茂金属原料为主要原料，制得的缠绕膜具有高拉伸强度、高回缩力、抗穿刺强、透明度高、抗撕裂强度高等优点，适用于栈板外包装以及工厂内部零散、半成品货物的包裹。将膜缠绕在货物的周围，使货物包装的更加紧密，能预防货物倒塌，防尘、防潮，起到保护货物的作用；同时使周转更灵活方便，减少人工，提高效率及降低成本的效果。

HongYan brand machine use stretch film produced from ExxonMobil Chemical Exxon and Dow Chemical Dow imported Linear Low - Density Polyethylene(LLDPE) resins and Metallocene raw material , the stretch film we produce has many advantages :high tensile strength , high retraction force , strong puncture resistance , high transparency , strong tear resistance , widely used in pallet wrapping and semi-finished products wrapping , a highly stretchable plastic film that is wrapped around items. The plastic recovery keeps the items tightly bound , dustproof , moisture proof , play a role in the protection of the goods , which makes the flow more flexible and convenient , labor-saving , high efficiency and less cost .



*常规机用缠绕膜规格型号

Conventional machine use stretch film specification& model

规格/型号 Spe./No	宽度 Width	厚度 Thickness	长度 Length	纸芯内径 Core Diameter
SFM-1250	500mm	0.012mm	2717m	76mm
SFM-1550	500mm	0.015mm	2173m	76mm
SFM-1750	500mm	0.017mm	1918m	76mm
SFM-2050	500mm	0.020mm	1630m	76mm
SFM-2250	500mm	0.022mm	1482m	76mm
SFM-2550	500mm	0.025mm	1304m	76mm
SFM-2850	500mm	0.028mm	1165m	76mm
SFM-3050	500mm	0.030mm	1087m	76mm

备注：特殊规格可以根据客户的要求定制。

Remark: Special specification available upon request

2. 手用缠绕膜 Hand Use Stretch Film

PE缠绕膜系列 PE Stretch Film Series

鸿雁牌手用缠绕膜主要以进口线性聚乙烯LLDPE原料为主要原料生产的一种薄膜，产品透明度高、延伸率高、抗穿刺力强，适用于栈板外包装以及工厂内部零散、半成品货物的包裹。将膜缠绕在货物的周围，使货物包装的更加紧密，能预防货物倒塌、防尘、防潮等，起到保护货物的作用，同时使周转更灵活方便。

HongYan brand hand use stretch film mainly used imported Linear Low - Density Polyethylene(LLDPE) as the main material , High transparency , good tensile strength , strong tear resistance. widely used in pallet wrapping and semi-finished products wrapping , a highly stretchable plastic film that is wrapped around items. The plastic recovery keeps the items tightly bound. dustproof , moisture proof , play a role in the protection of goods , which makes the flow more flexible and convenient.

*常规手用缠绕膜规格型号

Conventional hand use stretch film specification& model

规格/型号 Spe./No	宽度 Width	厚度 Thickness	长度 Length	纸芯内径 Core Diameter
SFH-0956	500mm	0.009mm	600m	76mm/50.8mm
SFH-1256	500mm	0.012mm	600m	76mm/50.8mm
SFH-1556	500mm	0.015mm	600m	76mm/50.8mm
SFH-1755	500mm	0.017mm	500m	76mm/50.8mm
SFH-2055	500mm	0.020mm	500m	76mm/50.8mm
SFH-2554	500mm	0.025mm	400m	76mm/50.8mm

备注：特殊规格可以根据客户的要求定制。

Remark: Special specification available upon request



3. 分切膜（迷你膜）Slitting Stretch Film (Mini Stretch Film) PE缠绕膜系列 PE Stretch Film Series

分切膜又叫迷你膜，常用宽度范围4-30cm，一般都是根据客户要求来进行定做，可以配用活动手柄、纸管加长等方法进行包装使用，主要用途有：电缆包装，货物捆绑打包等。

Slitting film also called mini film , the common width is 4-30cm, custom made available upon request , we can add flexible handle , paper tube extended to package, the main application: cable packing , goods bundle and package , etc.





www.hongyanpack.com

P 保护膜系列 PROTECTIVE FILM SERIES

我司生产的保护膜采用先进三层共挤押设备制造，主要有吹膜和流延两种生产工艺，适合各种产品保护之需求，分为静电保护膜、防静电保护膜、PET保护膜、网纹保护膜、平纹保护膜等。Our protective film manufactured by the most advanced three layers co-extrusion machine, blown and cast two kinds of production process, which can meet many kinds of demands on products' protection. Our protective film can be divided into Electrostatic protective film, Anti-static protective film, PET Protective Film, Reticulate protective film, Plain protective film, etc.

1. 静电保护膜 Electrostatic Protective Film

保护膜系列 Protective Film Series



静电保护膜又叫自粘保护膜，是采用行业最先进配方在无尘车间生产，具有不遗胶、粘性稳定等优良特性，是改善传统涂胶保护膜性能不稳定等常见质量问题的最佳选择。

■产品特征

优异的表面吸附性，耐湿性，无残胶。

■规格及物理参数

颜色：透明（其他颜色可以定做）

厚度（mm）：0.03-0.1

长度（m）：<5000

剥离力（gf/25mm）：0.5-5

宽度（mm）：<2000

■应用

光学产品、LCD 面板、电子材料、显示器、棱镜片、光扩散片、PC 面板、手机、塑料板、BL、导光板、亚克力板、HARD COATING 保护用、平板显示镜片加工保护等领域。

Electrostatic protective film also called self-adhesive protective film, is produced in clean room and adopted the advanced techniques. It has been used widely for the industries of optical-electronic material and panel display lens, so on due to its properties of no glue residue, stable adhesiveness while application, which is the best choice to improve the quality problems we met on the common protective film with glue-coating.

■Product Feature

Excellent surface adhesive, low water absorption, no Residue.

■Specification & Physical Data

Color: transparent (other colors available upon request)

Thickness(mm): 0.03-0.1

Length(m): <5000

Adhesiveness(g/25mm): 0.5-5

Width(mm): <2000

■Application

Optical products, LCD panel, electronic material, monitor, prism sheet, diffuser sheet, PC panel
Mobile phone, plastic board, BL, LGP, acrylic board, hard coating protection, flat lens processing protection.

2. 防静电保护膜 Anti-static Protective Film

保护膜系列 Protective Film Series



在无尘工程中，静电的产生吸附空气中的灰尘和微粒子会使产品不良率增加。我司提供的具有防静电特性的保护膜将防止空气中的灰尘和微粒子被产品表面吸附，从而提高产品质量。

■ 产品特征

低剥离力、无残胶。

■ 规格及物理参数

颜色：透明（其他颜色可以定做）

厚度（mm）：0.03 – 0.05

剥离力（g/25mm）：3–180

■ 应用

玻璃面、各类金属板面、电子光电等行业的各种产品的保护功能。

During the clean process , the static adsorbed the dust and mote in the air and increased defects rate , Our anti-static protective film can remove the statics absorbed the dust and particle on the products surface.

■ Product Feature

Low adhesion , no residue.

■ Specification& Physical Date

Color: transparent (other colors available upon request)

Thickness (mm): 0.03 – 0.05

Adhesiveness (g/25mm): 3–180

■ Application

Glass surface , all kinds of metal layout , electronic photoelectric industry' products protection , etc.



3. PET保护膜 PET Protective Film

保护膜系列 Protective Film Series



为了更有效的保护产品在生产制程中及其运输途中不受伤害而开发的一种新型保护膜，在运输过程中除了有防破损的作用外，还能有效的预防腐蚀和化学渗透。不仅维持清洁，还能防静电，具备容易剥离的特点。

■ 产品特征

透明性好、耐温、耐酸碱、耐化性好、易剥离、不残胶、不污染。

■ 规格及物理参数

颜色: 透明 (其他颜色可以定做)

厚度 (mm): 0.04-0.22

长度 (m): < 500

剥离力 (g/25mm): 5-500

宽度 (mm): < 1500

■ 应用

平板显示玻璃切割、打磨、高温蒸镀、印刷、UV施胶等过程保护。

It is developed to protect display devices against scratches during production lines and transportation. It also has an important role in preventing etching process and chemical infiltration, with antistatic function and easy-peeling property.

■ Product Feature

Excellent transparency, good heat-resistance and chemical solution resistance, excellent peeling stretch, no glue residue, no pollution.

■ Specification & Physical Data

Color: transparent (other colors available upon request)

Thickness (mm): 0.04-0.22

Length(m): < 500

Adhesiveness (g/25mm): 5-500

Width(mm): < 1500

■ Application

Protect panel display glass in cutting, polishing, high temperature evaporation, printing, UV gluing process.

T 胶带系列

APE SERIES



1. BOPP封箱胶带 BOPP Packing Tape

胶带系列 Tape Series



BOPP胶带是以BOPP聚丙烯薄膜为基材，经过加温均匀涂抹压敏胶乳液，使其形成 $8\mu\text{m}$ --- $28\mu\text{m}$ 不等的胶层，形成BOPP胶带母卷，成本低廉，是轻工业类企业、公司、个人生活中不可缺少的用品。

■产品特征

粘合力强，拉伸力度大，防水性及耐候性好，适应温差范围广。

■应用

可用于各种外箱的包装，粘贴牢固，具有一定的保护作用。

BOPP packing tape made from BOPP polypropylene film , $8\mu\text{m}$ --- $28\mu\text{m}$ layer formed after heating evenly coated pressure sensitive adhesive emulsion , then form BOPP tape parent roll , low cost and widely used in light industry , enterprise and individual living supplies.

■Product Feature

Good adhesive , high tensile strength , weather resistance , broad temperature range.

■Application

Packing carton boxes with automatic sealing machine. packaging for different kinds of cartons, paste firmly , play a role in protecting various items.

2. 双面胶带 Double Side Tape

胶带系列 Tape Series



双面胶带是以纸、布、塑料薄膜为基材，在其两面涂布压敏胶制成，用白色有机硅处理过的隔离纸，有持久的粘合力以及良好的耐水、耐蒸气、耐温、防紫外线、耐候性好。

■产品特征

粘合力强，双面粘合，方便易撕，使用干净。

■应用

理想的办公和家居轻量物品的贴合，粘固。可用于贴合标识照片、信封、装饰及挂钩等。用于制鞋和皮革业，计算机刺绣。

Double side tape made from paper , fabric , plastic film , coated on both sides with pressure adhesive , isolation paper with white silicone, durable adhesion and excellent water resistance , steam resistance , heating resistance , UV protection and good weather resistance.

■Product Feature

Strong adhesion , double-stick , easy-tear , convenient and neat.

■Application

Adhesive posters , photos , public notes , envelope , fixing of ornament hook or signboards, decoration , shoe & leather industry. For computerized embroidery , for computerized broiery , for laminating nameplate.

3. 美纹纸胶带 Crepe Masking Tape

胶带系列 Tape Series



美纹纸胶带是种高质量级别的遮蔽胶粘带，是以美纹纸及压敏胶水为主要原料，在美纹纸上涂覆压敏胶粘剂，另一面涂以防粘材料而制成的卷状胶粘带。可分为常温美纹纸胶带、耐高温美纹纸胶带，用皱纹纸做基材，单面涂布橡胶或者热熔胶剂，具有粘合紧，去除容易，耐溶剂性，耐水性的特点，广泛应用于表面喷涂时的遮蔽。

■产品特征

呈现自然色、优良的一致性、粘着力强、去除时无残余胶糊、可回收、胶带边缘切割平滑。

■应用

用于贴合，密封，分色及斑纹喷涂，喷涂后的烘干作业，适用于遮蔽作业。

Crepe masking tape is one kind of qualified tape used for masking , made from masking paper and pressure sensitive glue , masking paper coated with pressure - sensitive adhesive , the other side with sticky materials , can be divided into normal temperature masking tape and high temperature resistance masking tape , with crepe paper as backing , coated with rubber based acrylic or hot melt adhesive on one side .Bonds firmly , remove easily .Ideal for general protection against primers and light solvent paint system , widely used for masking surface during painting.

■Product Feature

Natural colored , good conformability , good adhesive , no adhesive residue , recycable , smooth trimmed edges.

■Application

Used for holding , sealing , color separation & painting on pin stripes used for non-critical masking , painting & spraying , paint bake operation .

4. PVC 电工胶带 PVC Insulation Tape

胶带系列 Tape Series

PVC电工胶带是以软质聚氯乙烯薄膜单面涂布橡胶或压敏胶制成，具有良好的绝缘性能，耐高电压，耐高温，滞燃性高，普遍用来对电器部件及电线的绝缘保护，广泛应用于电子，电器行业。

■产品特征

收缩弹性强、易撕、易卷、耐高电压、滞燃性高、耐候性高。

■应用

可用于包扎电线，空调管道，广泛用于电子电器行业的绝缘保护。

PVC Insulation tape is made from soft PVC film as backing materials , single side coated with rubber or pressure-sensitive adhesive , good insulation , high voltage , temperature resistance and flame retardant , used for insulation protection of electrical parts and wires.

■Product Feature

Flexibility with strong retract ability , easy tear and wire , high voltage resistance , flam retardant , weather resistance.

■Application

Electrical wire , automobile harness and wire , electronic industry insulation protection.



5. 铝箔胶带 Aluminum Foil Tape

胶带系列 Tape Series

铝箔胶带采用优质压敏胶，以经过有机硅处理的隔离纸制成，规格有（0.05mm-0.08mm）×各种宽度和长度，具有良好的防紫外线，防部分化学品，防潮，防火性能。主要应用于制冷，电子相关行业。

■产品特征

呈亮光银色、耐紫外线、防火防潮、可以阻止较多化学品腐蚀、户外应用、耐候性好。

■应用

广泛应用于各类变压器、手机、电脑PDA、PDP、LED显示器、笔记本电脑、复印机等各类电子产品内需电磁屏蔽的地方。

Aluminum foil tape made of Aluminum foil coated with excellent acrylic adhesive ,with siliconized release paper liner . the specification: (0.05mm-0.08mm) × different width and length , It is UV and flame resistant , moisture-proof & many chemical barrier . mainly used in cooling and electronic industry and reflection situation.

■Product Feature

Shiny silver , UV and flame resistant , moisture-proof & many chemical barrier , good for harsh , long-term application.

■Application

Apply to various types of transformers , mobile phones , computers , PDA , the PDP , LED display , notebook computers , copiers and other various electronic products , domestic demand electromagnetic shield.



6. 牛皮纸胶带 Kraft Paper Tape

胶带系列 Tape Series

牛皮纸胶带以牛皮纸为基材，涂布以压敏胶，具有高强度的粘合力，耐候性好，防水，防冻，易撕，是理想的绿色产品。

■产品特征

粘合力强、拉伸强度高、可以手撕、不会发生变形、无污染、可以再回收。

■应用

接纸、封箱等。

A kraft paper tape (coated with adhesive on single side with Kraft paper as backing) of fine quality of properties of high adhesion , weather resistant , water preventing , cold resistant and easy tear .It is an ideal green product.

■Product Feature

High adhesion , strong tensile strength , easy-tear , no deformation , no pollution , recyclable.

■Application

Adhesion of paper , sealing , etc.



7. 警示胶带 Warning Tape

胶带系列 Tape Series

警示胶带是以PVC薄膜为基材的胶带，涂上橡胶型压敏胶制作而成。也称为标识胶带，地标胶带。

■产品特征

具有高粘性、不残胶、耐候性良好、防水、防潮、抗蚀、防静电等特点。

■应用

专业用于标示警示区域、分割危险警示、标注分类等。

Warning tape made from PVC film, coated with rubber adhesive , also called marking tape , landmark tape.

■Product Feature

With high viscosity , no incomplete glue , waterproof , moisture proof , corrosion , antistatic , etc.

■Application

Professional used in identifying the warning area , splitting hazard warning , label classification, etc.



8. 布基胶带 Cloth Tape

胶带系列 Tape Series

布基胶带是以网格布经PE树脂处理后，涂布以油性压敏胶制成，具有优良的初粘力，防水性和防潮性，适用于重量类产品的粘合。

■产品特征

粘合力强、易撕、防老化、防潮、在剪切时不会引起变形。

■应用

适合于重量类物品的包装，可用于机器防尘，防潮，刮花等，可以接合地毯，电话线的保护，广泛用于工业方面，也可用于书册，档夹的补强，防滑。

Cloth tape comes from gauze treated by PE resin, coated with adhesive on single side ,excellent initial tack, water and moisture proof ,for heavy weight sealing.

■Product Feature

High adhesion , easy-tear , high anti-strain , humidity resistance , no deforming and curving.

■Application

Heavy duty packaging, protecting machines from rust , humidity , and scratch , carpet joining and affixing , telephone wire protection , widely used in industries , and book revamped , file classified , handle anti-slip.



9. 纤维胶带 Filament Tape

胶带系列 Tape Series

纤维胶带是以进口高密度无碱纤维布为基材，适用于变压器，高温设备，空调接触器及其它高温特殊环境的应用。

■产品特征

塑料纤维强化背材、张力强度极高、不易断裂、粘性极强、有高度的耐磨性及抗潮性能。

■应用

家电产品（洗衣机，冰箱等）的包装，金属及木制家具的捆扎，纸箱及其它重物的包装。

Filament tape made from imported high density non-alkali fiberglass cloth, apply to transformer, high temperature equipment , air conditioning contactor and other special high temperature environment application .

■Product Feature

A backing of polyester film reinforced with glass yam filament with adhesive , has the properties of good adhesion , high tensile strength , high wear resistance and tide resistance.

■Application

Household electrical appliance packaging(washing machine, refrigerator,etc) ,metal &wood furnishings bundling, carton&other heavy products packaging.



S 打包带系列

TRAP SERIES



1. PP打包带 PP Strap

打包带系列 Strap Series

PP打包带是采用聚丙烯为主要原料生产的一种轻型捆包带，我司生产的PP打包带适用于各种打包机器。如：半自动，全自动和手动打包机。还可根据客户需求定制符合客户现有打包机器匹配的新型PP打包带。

■产品特征

良好的抗拉强度、粘着力大、重量轻、耐腐蚀、美观高档、色泽鲜艳、颜色种类繁多、环保可回收再生循环利用、经济实惠。

■规格及物理参数

颜色：黄色、白色、绿色等（其他颜色可以定做）

宽度（mm）：9-15

厚度（mm）：0.5-1.5

拉力（kg）：90-300

长度（m）：>800

■应用

广泛用于纸业、金属制品业、化纤业、棉纺业、电子光电业、烟草业等。

PP strap uses polypropylene as the main raw material for production, is a new light strapping band. Our production of PP strap is in a variety of packaging machines. Such as: semi-automatic, automatic and manual baler. Also can produce the PP strap as per the customer's requirement.

■Product Feature

Excellent tensile strength, strong adhesive force, light weight, high-end appearance, bright and different colors, good corrosion resistant, environmental and recyclable, affordable.

■Specification & Physical Data

Color: yellow, white, green, etc (other colors available upon request)

Width (mm): 9-15

Thickness (mm): 0.5-1.5

Tensile (kg): 90-300

Length (m): >800

■Application

Widely used in paper industry, metal industry, chemical fiber industry, optoelectronics industry, tobacco industry, etc.

*常规PP打包带规格型号
Conventional PP strap specification & model

规格/型号 Spe./No	宽度 Width	厚度 Thickness	拉力 Tension	长度 Length	纸芯内径 Core Diameter
PPH-09060	9mm	0.6mm	>80kg	2600m	200mm
PPH-09070	9mm	0.7mm	>100kg	2200m	200mm
PPH-12060	12mm	0.6mm	>120kg	2000m	200mm
PPH-12070	12mm	0.7mm	>130kg	1700m	200mm
PPH-13560	13.5mm	0.6mm	>120kg	1750m	200mm
PPH-13570	13.5mm	0.7mm	>140kg	1450m	200mm
PPH-15060	15mm	0.6mm	>130kg	1700m	200mm
PPH-15070	15mm	0.7mm	>150kg	1400m	200mm
PPH-19070	19mm	0.7mm	>200kg	1050m	200mm
PPH-19080	19mm	0.8mm	>240kg	950m	200mm



打包扣 Packing Clasp



塑料封条 Plastic Seals

2. PET塑钢打包带 PET Strap

打包带系列 Strap Series

PET打包带俗称塑钢带，目前在世界上PET打包带是用于替代钢带和PP打包带的一种新型环保包装材料。

■产品特点

良好的抗拉强度，良好的拉紧保持性能；
成本低廉，1吨塑钢打包带等于5吨铁皮钢带的长度；
不生锈，耐腐蚀性；
可以根据包装形式变更颜色；
使用简单，安全，经济，环保，可再回收。

■规格及物理参数

颜色：绿色、黑色、白色等 厚度（mm）：0.5-1.0
表面处理：光面或压花 长度（m）：>450-3000
延伸率：5%-18% 普通拉力规格(min): 1600-9000
宽度（mm）：9.5-32mm 高拉力规格（min）：1800-11000

PET strap is commonly known as steel belt , poly stupid acid glycol ester as the main raw material , PET Strap is recognized as a new environment protective strapping material to substitute Steel strap &PP strap in the world.

■Product Feature

Excellent tensile strength and welding strength.
Splendid tension maintenance.
Less cost , 1 ton of PET strap length equal to five tons of the metal strap length.
Good rusty and chemical resistance.
Alternative colors according to the packing style.
Easy , safe and economical to use , environmental &recyclable.

■Specification& Physical Date

Color: green , black , white, etc Thickness(mm): 0.5-1.0
Surface: Smooth or Embosser Length(m): >450-3000
Elongation: 5%-18% General tension grade(min): 1600-9000
Width(mm): 9.5-32mm High tension grade(min): 1800-11000

*常规PET打包带规格型号
Conventional PET strap specification&model

规格/型号 Spe./No	宽度 Width	厚度 Thickness	拉力 Tension	长度 Length	纸芯内径 Core diameter
PET1606	16mm	0.6mm	>410kg	1376m	406mm
PET1608	16mm	0.8mm	>450kg	1200m	406mm
PET1908	19mm	0.8mm	>500kg	1020m	406mm
PET1910	19mm	1mm	>700kg	695m	406mm



■应用

主要用于造纸、钢铁、化纤、棉纺、玻璃、建材、铝锭、烟草、电子、印刷、陶瓷、木材、地板、金属制罐、电力电缆及机电类产品等产业，以及在运输包装重物的托盘捆扎等方面。

■Application

Mainly used in paper, steel, chemical fiber, cotton, glass, building materials, aluminum ingots, tobacco, electronics, printing, ceramics, wood, flooring, metal canning, electrical cable and machinery and electronic products, as well as heavy loads in the transport packaging and pallet strapping, etc.



PE 袋等系列

PE BAG & OTHER PLASTIC BAGS

1. 低压PE 袋

Low Pressure PE Bag



2. 高压PE 袋

High Pressure PE Bag



3. 防静电袋

Anti-Static Bag



4. 气泡袋

Bubble Bag



5. 铝箔袋
Aluminum Foil Bag



6. 真空袋
Vacuum Bag



7. 自封袋
Valve Bag



8. EPE珍珠棉袋
EPE Pearl Cotton Bag



9. 多色印刷袋
Multicolor Printing Bag





1. 纸护角 Paper Corner Protector

纸品系列 Paper Series

纸护角是多张牛皮纸复贴后，经护角机定型压制而成，用于货品堆码后，可加强包装物边缘支撑力并保护其整体包装强度，属于绿色环保包装材料。

■纸护角的优点：

- 1、纸护角从可将产品束在一起使整体包装更加坚实牢固；
- 2、把货物固定在托盘上，可起到保护产品及其边缘的作用；
- 3、在搬运过程中可以保护和支撑产品；
- 4、可根据客户的不同规格及要求量身定做。

■应用

各种行业托盘打包作业。

Paper corner protector made by multiple sheets of kraft paper , pressed by corner machine,after cargo stacked , the paper corner protector function is to strengthen the edge of items and protect the overall package strength , it belongs to green and environmental product.

Paper Corner Protector Advantages:

- 1 , Paper Corner Protector makes the products bundle together to ensure a more solid overall package;
- 2 , The goods fixed in the tray, can play a role in protecting products and its margins;
- 3 , Protect and support products in the handling process;
- 4 , Different specification available upon request.

■Application

Pallet packaging in many kinds of industries.



2. 纸管 Paper Tube

纸品系列 Paper Series

■应用

广泛的应用于在装卸搬运、保管、运输和包装等各个领域。更适合货物出口贸易行业，可以免烟熏免商检等一系列贸易行为，可为商家省时省力。

■Application

Widely used in loading and moving , custody , transporting and packaging , more suitable for the goods export trade business , can avoid smoked from commodity inspection , time-saving and labor-saving .



PE缠绕包装机 PE Wrapping Machine

机器设备系列 Machinery & Equipments Series

1. T1650F自动预拉伸缠绕包装机

适用于大宗货物的集装箱运输及散件托盘的包装。广泛应用于玻璃制品、五金工具、电子电器、造纸、陶瓷、化工、食品、饮料、建材等行业。能够提高物流效率、减少运输过程中的损耗，具有防尘、防潮、降低包装成本等优点。是提升产品包装档次的理想选择。

T1650F Automatic Pre-stretch Wrapping Machine

Pallet wrapper is used to wrap stretch film around a loaded pallet, widely used in glassware, hardware, electronic ,paper making ,ceramic, chemical ,food ,drink ,construction material industry, etc . improve logistics efficiency and reduce wear and tear during transport, with dust, moisture, reduce packaging costs, etc .It is the best choice to promote the level of package.



■性能参数

裹绕规格	(500-1200) mm × (500-1200)mm (L × W)
包装高度 (max)	L型: 1800mm H型: 2400mm
包装效率	20-40托/小时
转台速度	0-12rpm 转速变频可调
转台直径	1650mm
转台高度	78mm
转台承重 (max)	2000kg
膜架系统	预拉伸膜架, 预拉伸可达300%, 自动送膜, 变频调速
升降立柱	双链条结构, 升降速度变频可调
控制系统	PLC控制
整机重量(max)	700kg
外形尺寸	2745mm × 1650mm × 2863mm
功率/电压	转台0.75kw, 膜架0.37kw, 立柱0.37kw/AC220V

★特殊规格可定制

■Physical Date

Load size	(500-1200) mm × (500-1200)mm (L × W)
Packing height (max)	L Model: 1800mm H Model:2400m
Packing efficiency	20-40pallets / h
Turntable speed	0-12rpm,frequency adjustable
Turntable diameter	1650mm
Turntable height	78mm
Turntable capacity	2000kg
Film frame system	pre-stretch system up to 300% ,automatic film feeding , frequency control motor speed.
Lifting column	double-chain structure, vertical speed frequency adjustable
Control system	PLC control system
Machine weight	700kg
Machine dimensions	2745mm × 1650mm × 2863mm
Power/Voltage	turntable 0.75kw,film frame: 0.37kw, upright: 0.37kw/AC220V

★Special specification available upon request



2. T1800FZ-PL托盘在线式缠绕包装机

适应流水线作业的包装机械，非常适合现代化企业的自动化包装的需要，对提高包装效率、降低劳动强度，起到非常积极的作用。此类产品已经在化工、电子、食品、饮料、造纸等行业包装线中得到广泛应用。

T1800FZ-PL Fully Auto Pallet Wrapping Machine

This machine is fully automatic stretch wrap system that can operate in line ,it is very suitable for automatic packaging in modern enterprise , play a very active role in improving packaging efficiency and reduce labor intensity ,widely used in chemical ,electronic, food ,beverage, paper and other industry .



性能参数

裹绕规格	(800-1200)mm × (800-1100)mm(L × W)
包装高度 (max)	L型: 1800mm H型: 2400mm
包装效率	30-50托/小时
转速速度	0-15rpm转速变频可调,
转台尺寸	1800mm
转台高度	400mm
转台承重 (max)	2000kg
膜架系统	预拉伸膜架, 预拉伸可达300%, 自动送膜
升降立柱	双链条结构, 升降速度变频可调
控制系统	PLC可编程控制
气动系统工作压力	0.6-0.8Mpa
整机重量 (max)	1000kg
外形尺寸	2820mm × 1800mm × (2600-3200) mm
电源	380V AC/50Hz/20A, 三相五线
电机功率	转台0.75kw, 膜架0.37kw, 立柱0.37kw

Physical Date

Load size	(800-1200) mm × (800-1100)mm(L × W)
Packing height (max)	L Model:1800 mm H Model:2400m
Packing efficiency	30-50pallets / h
Turntable speed	0-15rpm, frequency adjustable
Turntable diameter	1800mm
Turntable height	400mm
Turntable capacity(max)	2000kg
Film frame system	pre-stretch system up to 300%, automatic film feeding
Lifting column	double-chain structure, vertical speed frequency adjustable
Control system	PLC control system
Pneumatic working pressure	0.6-0.8Mpa
Machine weight (max)	1000kg
Machine dimensions	2820mm × 1800mm × (2600-3200) mm
Voltage	380V AC/50Hz/20A, 3phase 5 wire
Power	turntable 0.75kw, film frame: 0.37kw, upright: 0.37kw

PE缠绕包装机 PE Wrapping Machine

机器设备系列 Machinery & Equipments Series

3. R1800FZ-PL悬臂在线式缠绕包装输送系统

主要适用于生产量大、物流效率较高的现代化作业，满足较轻或较重货物的包装要求。可根据不同的产品和现场的实际需求，定制不同的包装系统，自动完成货物的检测、包装、输送等全过程，自动上断膜机构可实现无人化操作。广泛应用于食品、饮料、化工、造纸、建材等行业。

R1800FZ-PL Rotary-arm Stretch Wrapping Machine

This machine is mainly used in large quantity and high logistic efficiency modern operation, ideal wrapper for the goods quite light or quite heavy, and different package system can custom made upon request. sensor, package, transport can finish automatically, automatic broken membrane agencies can realize the unmanned operation, widely used in food, beverage, chemical, paper making, construction material and other industries.



■性能参数

裹绕规格	(500-1300)mm × (500-1200)mm(L × W)
包装高度 (max)	1800mm
包装效率	40-50托/小时
悬臂速度	0-15rpm 速度变频调速
悬臂系统	悬臂自动复位,高灵敏度紧急刹车系统
膜架系统	预拉伸膜架, 预拉伸可达250%, 自动送膜, 送膜速度可调
自动上断膜装置	自动夹紧, 切断拉伸膜, 实现无人自动操作
气动系统工作压力	0.6-0.8Mpa
耗气量	1000ml/min
升降立柱	链条输送, 升降速度变频可调
输送系统	输送线高度: 400mm, 输送线速度: 15m/min, 输送线承重: 1500kg
控制系统	PLC控制
外形尺寸	3440mm × 1800mm × 3220mm (不含输送线)
功率/电压	悬臂0.75kw, 膜架0.37kw, 立柱0.37kw, /AC220

■Physical Date

Load size	(500-1300) mm × (500-1200)mm(L × W)
Packing height (max)	1800mm
Packing efficiency	40-50pallets / h
Turntable speed	0-15rpm, frequency adjustable
Turntable system	cantilever automatic reset, high sensitivity and emergency brake system
Film frame system	pre-stretch system up to 250%, automatic film feeding
Automatic on-off membrane devices	automatic clamping, cutting off the stretch film, unmanned automatic operation
Pneumatic working pressure	0.6-0.8Mpa
Gas Consumption	1000ml/min
Lifting column	the chain conveyor, lifting variable frequency speed can be adjusted
Conveying system	conveyor line height: 400mm conveyor line speed: 15m/min, conveyor line weight: 1500kg
Control system	PLC control system
Machine dimensions	3440mm × 1800mm × 3220mm (not include transmission line.)
Power/voltage	turntable 0.75kw, film frame: 0.37kw, upright: 0.37kw/AC220V



4. Y2000F圆筒式缠绕包装机

圆筒式缠绕包装机对圆筒状物体进行轴向包装，实现物体的整体裹包。有利于货物的储存、运输及周转，具有防尘、防潮的作用。其包装成本低，效率高。同时，根据包装的实际需要，可选用圆筒-托盘两用型、自动顶出型、自动在线等设备。

Y2000F Reel Stretch Wrapping Machine

This machine is designed for packing paper rolls, realize the goods overall package , it goods for shortage , transport and turnover , dustproof , moisture proof . Lower packaging cost , high efficiency .At the same time , according to the actual demand , can choose cylinder-tray , automatic ejector available type , and automatic on-line equipment.



■性能参数

裹绕规格	(500-1500) mm X(500-1600)mm
包装高度 (max)	1800mm
包装效率	30托/小时
转台承重 (max)	2000 kg
转台速度	0 ~ 12 rpm
转台直径	φ 2000 mm
转台高度	460mm (顶出型: 530mm)
整机重量	1080kg
电源	380V AC/50HZ/20A 三线五相
电机功率	转台0.75kw,膜架0.37kw, 立柱0.37kw

■Physical Date

Load size	(500-1500) mm X(500-1600)mm
Packing height (max)	1800mm
Packing efficiency	30pallets / h
Turntable capacity(max)	2000kg
Turntable speed	0-12rpm
Turntable diameter	φ 2000 mm
Turntable height	460mm (Ejector type:530mm)
Machine weight	1080kg
Power	380V AC/50HZ/20A ,3 phase 5 wire.
Power/voltage	turntable 0.75kw,film frame:0.37kw, upright: 0.37kw

打带机 Strapping Machine

机器设备系列 Machinery & Equipments Series

高性能打带机可联机在动力输送机中和无动力输送机中，机头被安装侧方，配置自动穿箭装置，自动穿入托盘脚中心位置，自动对进入的包装进行自动定位，自动打带包装；操作简单可靠方便

■技术参数

带子材质：PP PET

规格：宽度10-19mm 厚度0.5/1mm

束紧力：100-4000N

The high-performance automatic machine to strap packages can be integrated in driven and non-driven conveyance elements. Compact design with sealing unit integrated in the side, automatic strap insert, precise strap guidance and positioning, all designed for easy operation.

■Technical Date

Strap material: PP PET

Specification: width 10-19mm thickness 0.5/1mm

Strap tension :100-4000N



该机型为水平打带机，可输送线联机作业或者单独单机作业，针对托盘物料进行打带包装，水平打带位置和数量可在控制面板上输入和操作。

工作方式：电气

■技术参数

带子材质：PP PET

规格：宽度10-19mm 厚度0.5/1mm

束紧力：100-3500N

This model makes the horizontal strapping patterns of palletized units, with one or more straps patterns at different heights according to programs been selected time by time.

Working method: Electric

■Technical Date

Strap material: PP PET

Specification: width 10-19mm thickness 0.5/1mm

Strap tension: 100-3500N





打包机系列 Baler Series

机器设备系列 Machinery & Equipments Series

1. HY-101A全自动打包机

电源功率: 380V /50HZ 750W/5A

打包速度: ≤ 2.5 秒/条

台面高度: 750mm

框架尺寸: 宽800mm 高度可根据客户要求定制。

捆扎形式: 平行1-多道, 方式点动、手动、连打、球开关、脚踏开关。

适用包带: 厚 (0.55-1.2) mm*宽 (9-15) mm

电器配置: LG "PLC" 控制, 法国 "TE", 日本 "OMRON", "ZIK", 适合常规物体捆包。

HY-101A Fully Automatic Baler

Power : 380V /50HZ 750W/5A

Packing speed : ≤ 2.5 sec/strip

Height : 750mm

Dimension : width 800 mm ,different height available upon request.

Packing type : parallel to the 1 - or multi-channel, the way to jog , manual and even playing ball switch and foot switch

Strap : thickness(0.55-1.2)mm width (9-15)mm

Electrical configuration : LG "PLC" control , French "TE" , Japan "OMRON" , "ZIK" , electric equipment , suitable for conventional goods strapping.



2. HY-103A全自动打包机

电源功率: 380V /50HZ 750W/5A

打包速度: ≤ 2.5 秒/条

台面高度: 750mm

框架尺寸: 宽800mm 高度可根据客户要求定制。

捆扎形式: 平行1-多道, 方式点动、手动、连打、球开关、脚踏开关。

适用包带: 厚 (0.55-1.2) mm*宽 (9-15) mm

电器配置: LG "PLC" 控制, 法国 "TE" 日本 "OMRON", "ZIK"电器, 适合特别宽的物体捆包。

HY-103A Fully Automatic Baler

Power : 380V /50HZ 750W/5A

Packing speed : ≤ 2.5 sec/strip

Height : 750mm

Dimension : width 800 mm ,different height available upon request.

Packing type : parallel to the 1 - or multi-channel, the way to jog , manual and even playing ball switch and foot switch

Strap : thickness(0.55-1.2)mm width (9-15)mm

Electrical configuration : LG "PLC" control , French "TE" , Japan "OMRON" , "ZIK" electric equipment. Suitable for particular wider goods strapping.



3. PP-750半自动打包机

电源功率: 220V /50HZ $\pm 10\%$ 660W

打包速度: ≤ 5 秒/条

体积: 895x565x730mm

最小打包物: 60mm

最大打包物: 不限

打包带宽度: 6-15mm

电器配置: 采用PLB控制, 自动停机装置, 内置式捆紧器, 电磁离合转动。

PP-750 Semi- Automatic Baler

Power : 220V /50HZ $\pm 10\%$ 660W

Packing speed : ≤ 5 sec/strip

Volume : 895x565x730mm

Minimum packing item : 60mm

Maximum packing item : no limited

Strap width : 6-15mm

Electrical configuration : PLB control, automatic shutdown device, built-in tied tight control, the electromagnetic clutch rotation.



电动手持式打包工具 Battery Strapping Tools

机器设备系列
Machinery & Equipments Series

1.型号: ST-909LT

■工作模式:

一键式全自动模式
半自动模式
柔和模式

■技术参数:

打包带材质: PP PET
打包带宽度: 10-16mm
打包带厚度: 0.5-1.1mm
最大束紧力: 2700N 270KG
熔接类型: 摩擦熔接
电池: 14.4Vdc-3.0锂电池
重量: 3.7kg(包含电池)
显示界面: 数字式显示, 同时显示3种数字, 束紧力, 熔接时间, 电池容量

1.Model: ST-909LT

■Operation Mode

One button auto
Semi-auto
Soft

■Technical Date

Strap materials: PP PET
Strap width: 10-16mm
Strap thickness: 0.5-1.1
Max tension: 2700N 270kg
Joint type: friction weld seal
Battery: 14.4Vdc-3.0Ah Li-ion
Weight: 3.7kg(include battery)
Display interface : digital diaplay , simultaneously show 3 kinds of numbers , tightening force , welding time , battery capacity.



2.型号: SMART LXT

■技术参数:

打包带材质: PP PET
打包带宽度: 10-19mm
打包带厚度: 0.5-1.05mm
最大束紧力: 2300N 230KG
熔接类型: 摩擦熔接
电池: 14.4Vdc-3.0锂电池
重量: 3.8kg(包含电池)

2.Model: SMART LXT

■Technical Date

Strap materials: PP PET
Strap width: 10-19mm
Strap thickness: 0.5-1.05mm
Max tension: 2300N 230KG
Joint type: friction weld seal
Battery: 14.4Vdc-3.0Ah Li-ion
Weight: 3.8kg(include battery)



气动手持式打包工具 Pneumatic Strapping Tools

机器设备系列
Machinery & Equipments Series

1.型号: POLI LT

■技术参数:

打包带材质: PP PET
打包带宽度: 10-19mm
打包带厚度: 0.4-0.9mm
最大束紧力: 2500N 250KG
熔接类型: 摩擦熔接
气动马达: 德国博世
气压: 6-7Bar
重量: 4.9kg

1.Model: POLI LT

■Technical Date

Strap materials: PP PET
Strap width: 10-19mm
Strap thickness: 0.4-0.9mm
Max tension: 2500N 250KG
Joint type: friction weld seal
Motor: BOSCH GERMAN
Air pressure: 6-7Bar
Weight: 4.9kg



2.型号: POLI25 32HT

■技术参数:

打包带材质: PET
打包带宽度: 25-32mm
打包带厚度: 0.8-1.3mm
最大束紧力: 6000N 600KG
熔接类型: 摩擦熔接
气动马达: 德国博世
气压: 6-7Bar
重量: 5.6kg

2.Model: POLI25 32HT

■Technical Date

Strap materials: PET
Strap width: 25-32mm
Strap thickness: 0.8-1.3mm
Max tension: 6000 N 600KG
Joint type: Friction weld seal
Motor: BOSCH GERMAN
Air pressure: 6-7Bar
Weight: 5.6kg





宁波鸿雁包装材料有限公司

Ningbo Hongyan Packing Material Co., Ltd

地址：中国 浙江省宁波市镇海区镇骆西路

Address: West Zhenluo Road, Zhenhai District, Ningbo City, Zhejiang Province, China

邮编 / Post code: 315206

电话 / Tel: +86-574-8659 1877 8659 2038 8655 0826

传真 / Fax: +86-574-8659 3198

E-mail: hongyan@hongyanpack.com hongyansales@163.com

24小时服务热线 **+86-(0)135 6790 3098**

24-hour service hotline